# Analysis of Suppressant-Enhanced Overpressure in the FAA Aerosol Can Simulator

SUPDET 2012 March 7 – 8, 2012 Phoenix, AZ

Greg Linteris, *NIST Fire Research*Don Burgess, Jeff Manion, *NIST Chemical Kinetics Vish Katta, ISI Fumi Takahashi, Case Western Reserve Univ.*Oliver Meier, *The Boeing Company* 







National Institute of Standards and Technology Building and Fire Research Laboratory



## Problem: want to eliminate Halon 1301 from use in aircraft cargo bays

## 1. Halon 1301 ( $CF_3Br$ ) => high ODP, high GWP.

	Compound	Atmospheric Lifetime (yrs)	ODP	<b>GWP</b> <sub>100</sub>
FC F	Halon 1301 (CF <sub>3</sub> Br)	65	12	6,900
H	HFC-125 (CF <sub>3</sub> CF <sub>2</sub> H)	29	0	3,400
F F F	2-BTP (CH <sub>2</sub> CBrCF <sub>3</sub> )	0.008	0	N/A
$H_2C \longrightarrow Br$	FK-5-1-12 (CF <sub>3</sub> CF <sub>2</sub> C(O)CF(CF <sub>3</sub> ) <sub>2</sub> )	0.014	0	1
O	E			


$$F_3C$$
 $F$ 
 $CF_3$ 
 $F$ 
 $CF_3$ 

#### Goals

Understand the overpressure phenomena in the FAA Aerosol Can Test

1. Why is the overpressure occurring with the added suppressants?

2. What can be done about it?

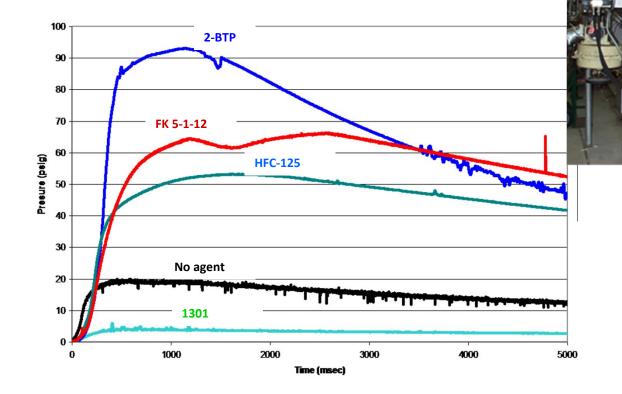

**FAA Aerosol Can Test Chamber** 

#### Other Applications

#### 1. Flammable refrigerants

- a.) new, low-ODP, low-GWP, working fluids are more flammable than the fire suppressants—which themselves burn under some conditions,
- b.) refrigerants may be mixed with more flammable materials (natural gas, hydrocarbons, oils, etc.).


#### 2. Clean agent suppression of electrical fires.

a.) added energy from an electrical source make clean agents less effective. The reasons are the subject of investigation.

#### Approach

#### Physics in FAA test is too complicated to examine with detailed kinetics, so

- 1. <u>simplify</u>, use flame descriptions which will be accurate in some parts of the test
- 2.  $\eta$ ,  $X_{inh}$

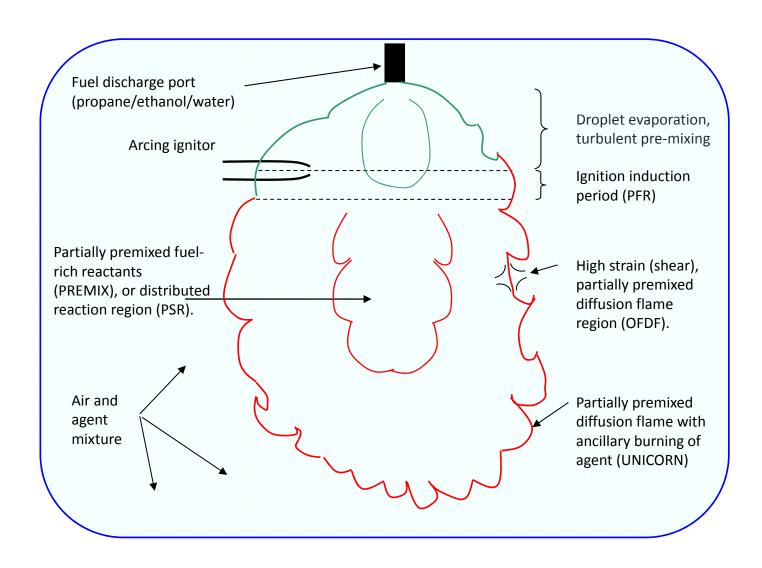

#### **Progress**

- 1. Review of previous work
- 2. Thermodynamic Equilibrium Calculations (HFC-125, CF<sub>3</sub>Br, 2-BTP)
- 3. Perfectly-Stirred Reactor (PSR) Calculations (HFC-125, CF<sub>3</sub>Br)
- 4. Novec Mechanism and Simulations
- 5. 2-BTP Mechanism (end)
- 6. Premixed Flame Calculations for HFC-125 (PREMIX)
- 7. Homogeneous Auto-Ignition (PFR) Calculations
- 8. Combustion Bomb Experiments
- 9. Comparison of Flammability limits and Bomb Results

- Last presentation
- This presentation

Background: Previous findings

## ~ Of the 65 relevant papers collected and assimilated, these are highlights (in which enhanced combustion has been discussed):

Researchers	<u>Fuel</u>	Agents	Experiment	Phenomena	Explanation		
Grosshandler and Gmurczyk	Propane, ethylene	CF3I, CF3Br, HFCs	Detonation - Deflagratoin Tube	Higher Ma, flame speed, pressure ratio	None		
Shebeko et al.	methane, hydrogen	C2HF5, C4F10	Deflagration	Higer pressure rise and dP/dt	Added heat release from agent		
Moriwaki et al.	methane, ethane	CH3Cl, CH3l, CH3, Br	Shock tube	Shorter ignition dela	None		
Ikeda and Mackie	ethane	C3HF7	Shock tube	Shorter ignition dela	None		
Mawhinney et al.	heptane	water mist	Heptane pool fi	Higher heat release	Enhanced flu	id-dynamic	mixing
Hamins et al	hydrocarbons	HFCs, water mist, N2, powders	Full-scale tests	Higher pressure, visual flames	Enhanced flu	id-dynamic	mixing
Holmstedt et al.	propane	C3HF7, C2H2F4, CF3Br,	Diffusion flame	Higher heat release	None		
Katta et al.	methane	CF3H	Cup burner	Higher heat release	Agent reaction	on	
Ural	none	C3HF7, C2H2F4, CHCIF2	Flammability tube/chamber	Visual observation	Heat loss/ gain		

Background: Flame Extinction

## Flames go out when: $\tau_{chem} > \tau_{flow}$

A measure of the overall chemical reaction rate can be obtained with:

Perfectly-Stirred Reactor (PSR) Calculations

Diffusion Flame Calculations (Counterflow)

Premixed Flame Calculations


=> Examine behavior of R-125, 2-BTP, Novec 1230 and CF<sub>3</sub>Br

Background: Flame Extinction


⇒ Why is it surprising that R-125 enhanced combustion in the ACT at 11.3 % ?

#### **Experimental R-125 Extinction Results:**


- 1. Methane air cup burner: ≈10.4 %
- 2. 0 strain, heptane air counterflow diffusion flame: ≈9 %
- 3. 0 strain, propane air counterflow diffusion flame: ≈9.5 %

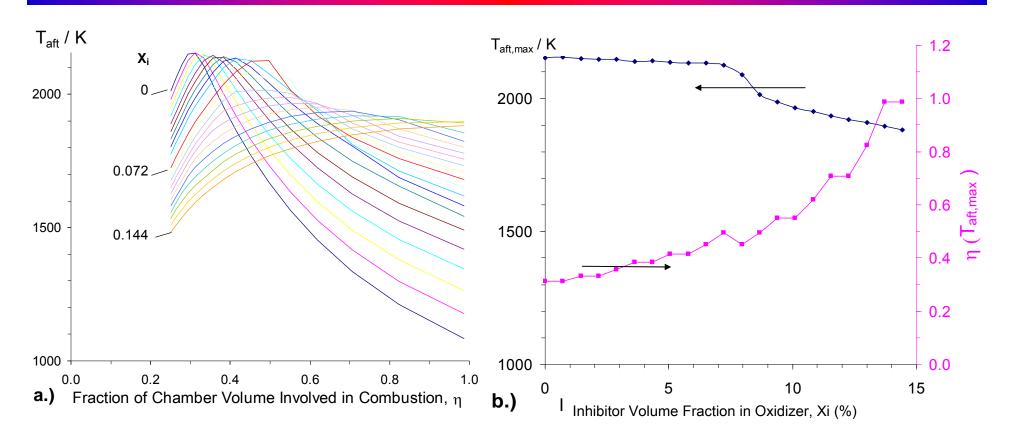


- $T_{aff}$  is high for all  $\eta$ .
- Change in behavior at [X]/[H]=1 (about 7.5 % HFC-125, red curve above).
- With large amounts of agent, a wide range of  $\boldsymbol{\eta}$  gives nearly equivalent  $T_{\text{aft}}.$
- As agent is added, more and more chamber volume is necessary to achieve stoichiometric combustion.

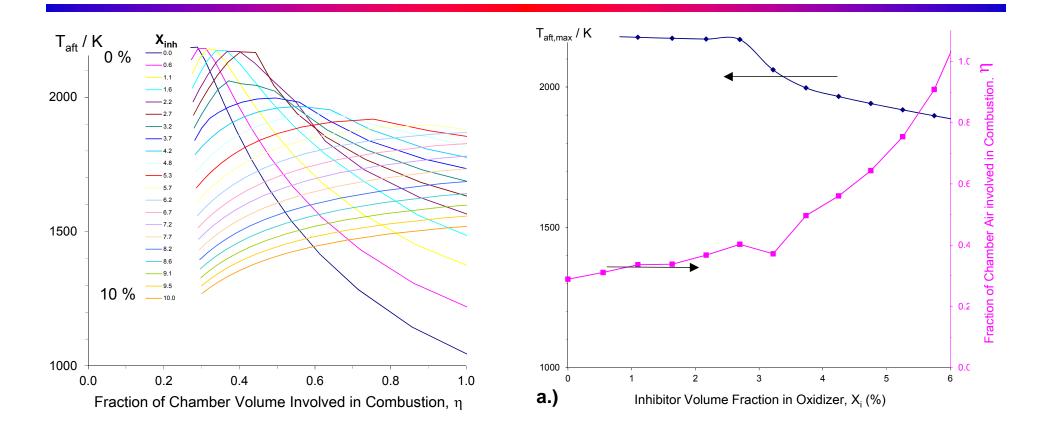

- $T_{aff}$  is high for all  $\eta$ .
- Change in behavior at [X]/[H]=1 (about 2.7 % Novec 1230, purple curve above)
- With large amounts of agent, a wide range of  $\eta$  gives nearly equivalent  $T_{aff}$ .
- As agent is added, more and more chamber volume is necessary to achieve stoichiometric combustion.

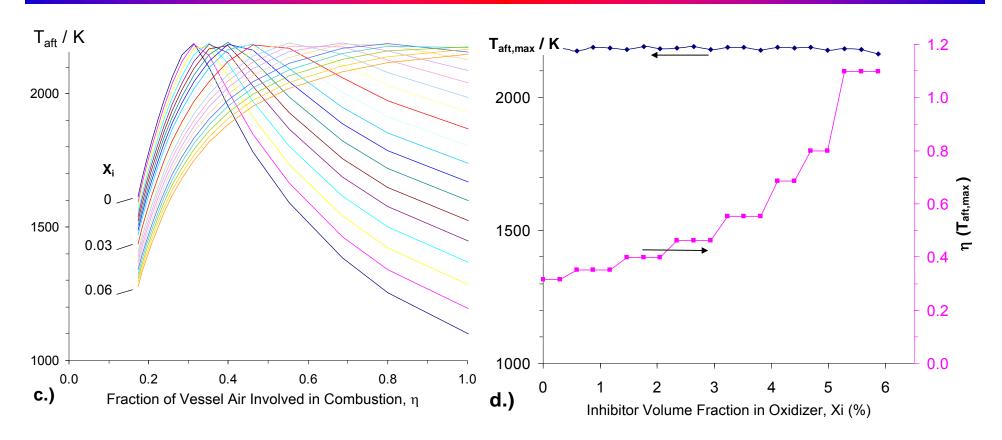


- $T_{aff}$  is high for all  $\eta$ .
- most of the plot is below [X]/[H]=1 (about 6 % 2-BTP), so can't see change at [X]/[H]=1 .
- With large amounts of agent, a wide range of  $\boldsymbol{\eta}$  gives equivalent  $T_{\text{aft}}.$
- As agent is added, more and more chamber volume is necessary to achieve stoichiometric reaction.
- Where flame might extinguish( $X_i$ =6 %), all the chamber volume is involved in combustion (i.e.,  $\eta$ =1).

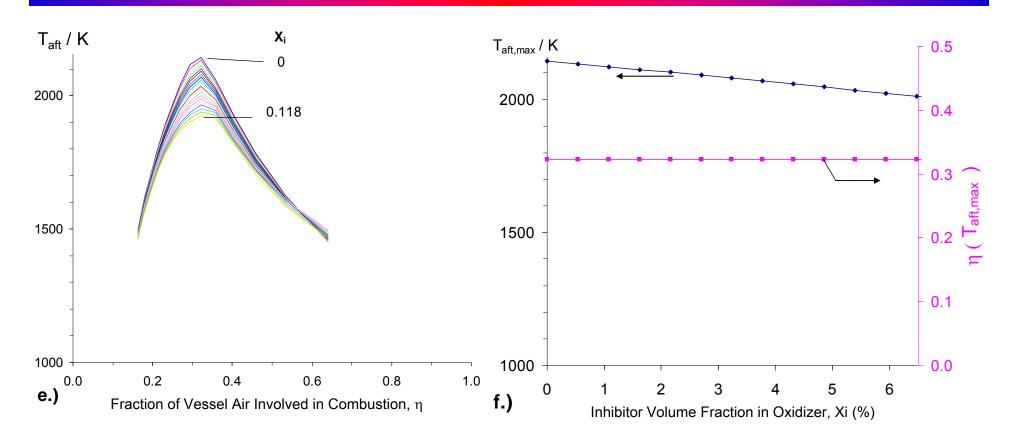

- $T_{\text{aft}}$  is high for all  $\eta$ ., but decreases somewhat as agent is added.
- most of the plot is below [X]/[H]=1 (about 11 % CF<sub>3</sub>Br), so can't see change at [X]/[H]=1.
- The amount of chamber volume for peak T<sub>aft</sub> does not change with X<sub>i</sub>.


-Why? => 
$$CF_3Br + 2H_2O = 3HF + HBr + CO_2$$
,

- -i.e., there's always enough H and O in the system to oxidize the CF<sub>3</sub>Br without more air!
- The  $T_{\text{aft}}$  is very sensitive to  $\eta.$

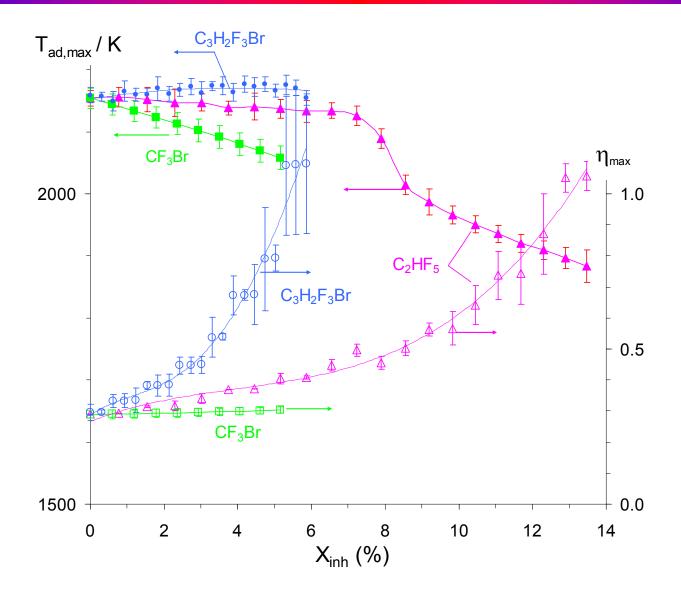


## Thermodynamic Equilibrium Calculations


What do they tell us about the <u>maximum</u> pressure rise?

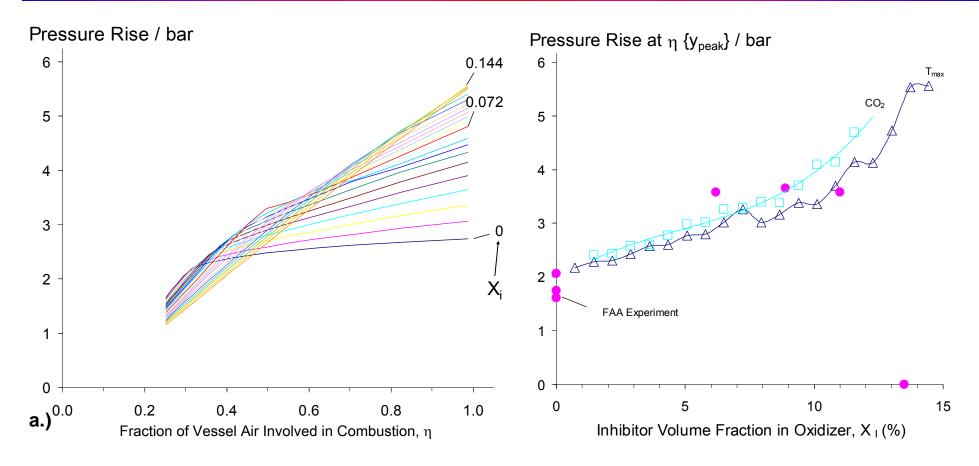


- The higher  $\eta$ , the greater  $\Delta P$  (more reactants, more heat release, more expansion of hot products—since the oxidizer also includes a "fuel" species).
- The actual fraction of chamber volume (oxidizer) which can react has a large influence on  $\Delta P$ .
- Equilibrium thermodynamics predicts the final pressure quite well.
- Why does the agent not reduce the extent of reaction?

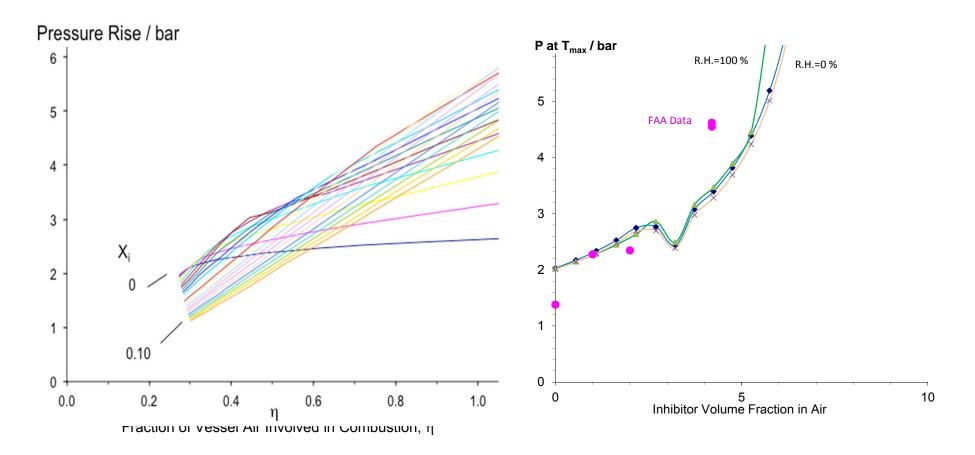


- The higher  $\eta$ , the greater  $\Delta P$  (more reactants, more heat release, more expansion of hot products—since the oxidizer also includes a "fuel" species).
- The actual fraction of chamber volume (oxidizer) which can react has a large influence on  $\Delta P$ .
- Equilibrium thermodynamics predicts the final pressure quite well.
- Why does the agent not reduce the extent of reaction?

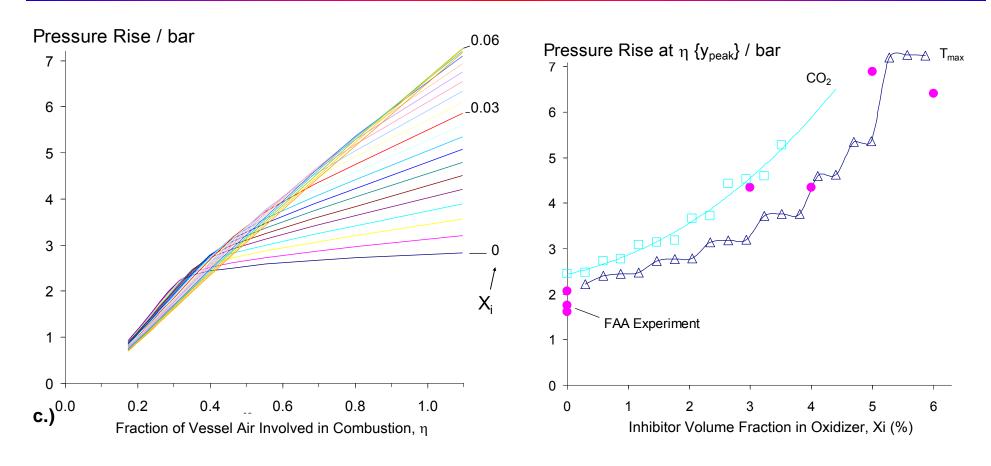

- Same basic behavior as R-125, but greater  $\Delta P$ .
- The actual fraction of chamber volume (oxidizer) which can react has a large influence on  $\Delta P$ .
- Equilibrium thermodynamics predicts the final pressure quite well.
- Why does the agent not reduce the extent of reaction?

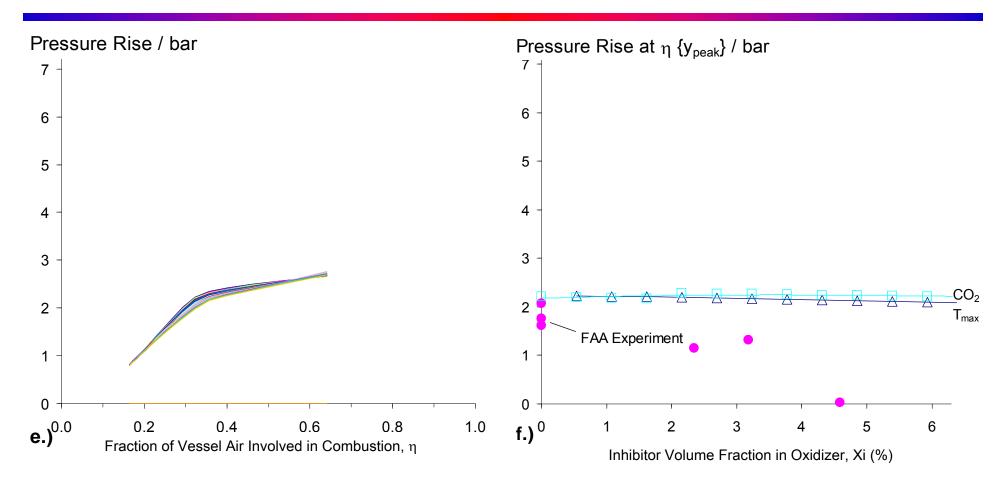

- Higher  $\eta$  has very little effect on  $\Delta P$ .
- At  $\eta$  of peak  $T_{aff}$ , or  $CO_2$ , the  $\Delta P$  is constant! => can't use pressure rise to determine  $\eta$ .
- Actual  $\Delta P$  is always less than predicted. This is due to a chemical kinetic effect, but is it from Br or from reduced temperature (i.e., from mixing-induced dilution)?
- => MUST LOOK AT THE KINETICS TO FIND OUT!

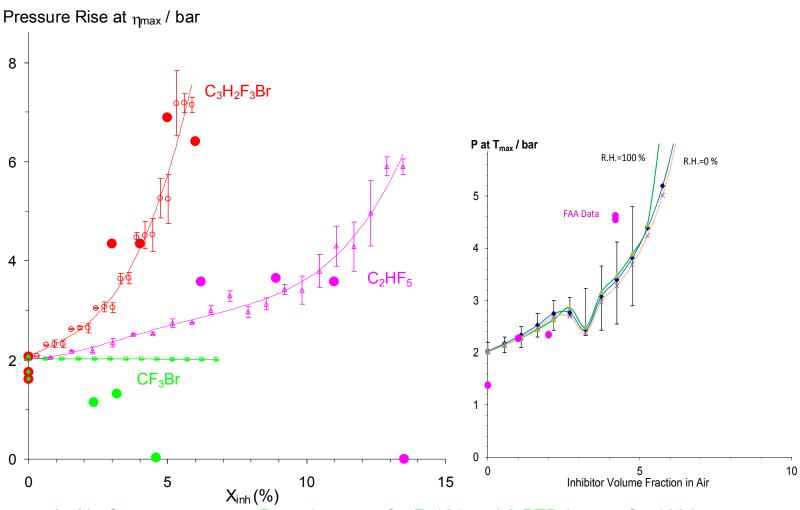

- As  $X_i$  of agent goes up,  $\Delta P$  can increase for R-125 and 2-BTP, but not for 1301.
- But why don't all the agents lower the reaction rate?
- => MUST LOOK AT THE KINETICS TO FIND OUT WHY!

Sub Mechanism	<u>Species</u>	<u>Reactio</u>	<u>ons</u>
C <sub>4</sub> hydrocarbon mechanism from Wang	111	784	
Ethanol mechanism of Dryer	5	36	
HFC mechanism from NIST	51	600	
CF <sub>3</sub> Br mechanism of Babushok (NIST)	10	122	
	177	1494	
Novec 1230 mechanism (Babushok)	3	14	Reaction  C2F5COC3F7 => C3F7+C2F5CO  C2F5CO = CF3-CF2+CO  C2F5COC3F7 + H = C2F5CHO + C3F7  C2F5CHO + H = C2F5CO + H2  C2F5CHO = CF3-CF2 + HCO  C2F5COC3F7+OH = C2F5CO+C3F7OH  C2F5COC3F7+O = C2F5CO+C3F7O  CF3+C2F5CHO = CHF3+C2F5CO  CH3+C2F5CHO = CH4+C2F5CO  CF3COF+CF3=CF3CO+CF4  CF3COF+CF3-CF2=CF3CO+CF3-CF3  CF3-CF3+CF3-CF4+CF3-CF2  CF3CO+F=CF3+CF:O

#### 2-BTP Mechanism Development

Jeff Manion, Don Burgess, Iftikhar A. Awan

Combustion and Kinetics Group
Chemical and Biochemical Reference Data Division
Material Measurement Laboratory
NIST

(in progress)


#### 2-BTP Simulant

- Can't do calculations yet for 2-BTP because there's no mechanism for its initial decomposition.
- Once we have its decomposition to HFC and HBrC fragments, it will feed into the overall NIST HFC mechanism.
- So, we must first estimate/measure/calculate its decomposition => CSTL.

## Kinetic Mechanism Development

CH4-air premixed flame, 0, 4, and 6 % R-125

Currently developing these charts for HFC-125 with propane and ACT.

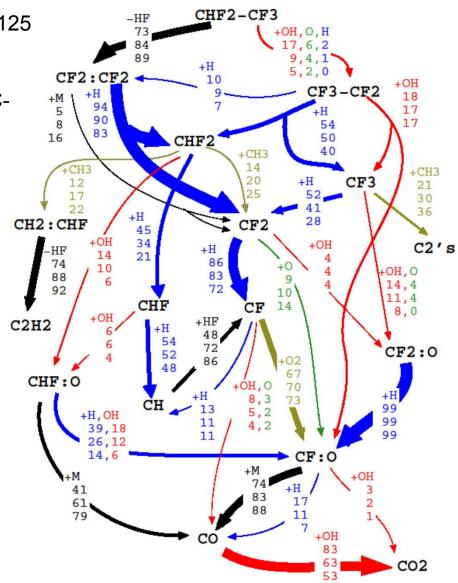

Background: Why PSR?

#### Perfectly-Stirred Reactor (PSR) Calculations

Overall reaction rate in a PSR has been correlated with

- flame speed [1],
- extinction of cup-burner flames [2].


The Aerosol Can test is turbulent, 2-phase, partially premixed, so a PSR is a reasonable approximation.

[1] R.B.Barat, Chemical Engineering Science 56 (2001) 2761-2766.

[2] S.Liu, M.C.Soteriou, M.B.Colket, J.A.Senecal, Fire Safety Journal 43 (2008) 589-597.


## Perfectly-Stirred Reactor (PSR) Calculations

- Used to estimate the overall chemical reaction rate.
- Performed for R-125, Novec, and 1301.

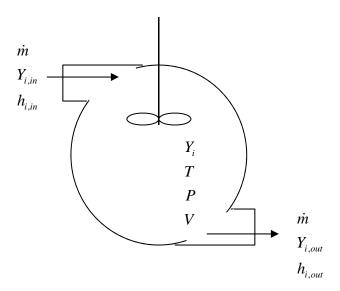


## **Assumptions:**


- specified premixed inlet conditions.
- adiabatic (no heat losses), no species reaction at the walls.
- perfectly stirred (outlet conditions are the same as the reactor conditions).
- steady-state operation.

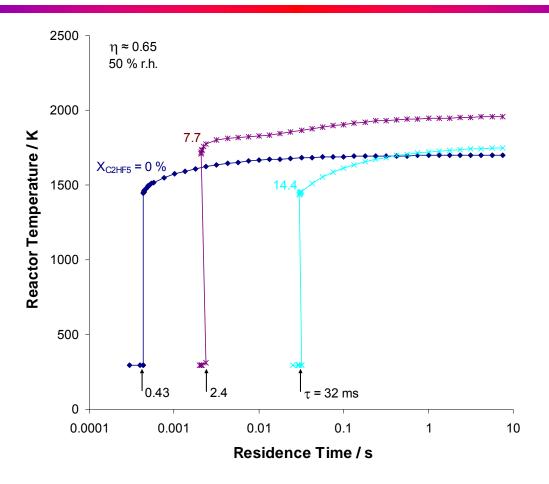


- 1. We want a measure of  $\tau_{\text{chem}}$
- 2. At the blow-out condition,  $\tau_{\text{chem}} = \tau_{\text{flow}}$
- 3. To find the blow-out condition, calculate  $T_{psr}$  at decreasing values of the residence time,  $\tau_{flow}$ , until the time is too short for reaction to occur ( $T_{psr}$  drops to inlet temperature at blow-out).

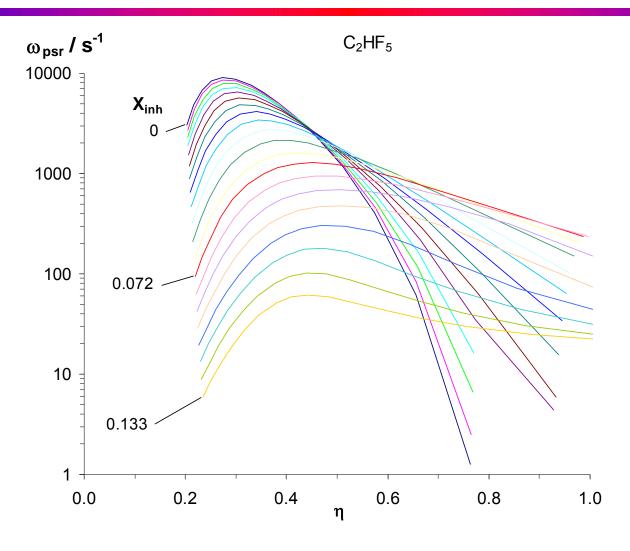


- Adding R-125 lowers  $\omega_{\text{chem}}$  for rich mixtures (low  $\eta$ ), but raises (then lowers) it for lean mixtures (high  $\eta$ ).
- $-\eta$  has a big effect on overall chemical rate at low  $X_i$ , less effect at high  $X_i$  (follows temperature results).
- i.e., for higher  $X_{i}$ , these curves flatten (  $\omega_{chem}$  is insensitive to  $\eta$  for  $\eta$  > 0.4 ).

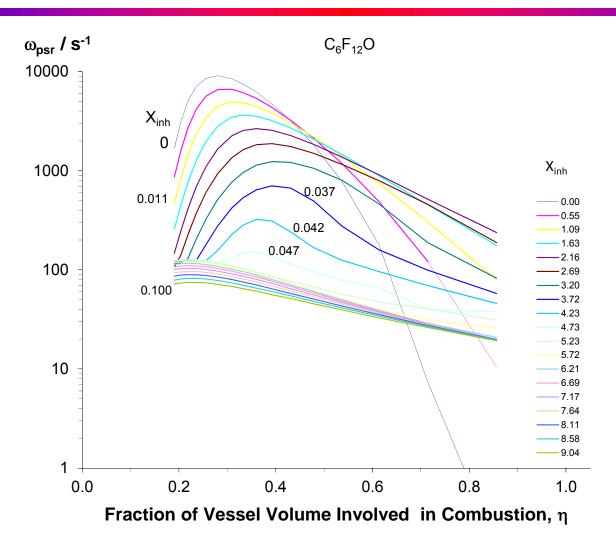


- Adding R-125 lowers  $\omega_{\text{chem}}$  for rich mixtures (low  $\eta$ ), but raises (then lowers) it for lean mixtures (high  $\eta$ ).
- $-\eta$  has a big effect on overall chemical rate at low  $X_i$ , less effect at high  $X_i$  (follows temperature results).
- i.e., for higher X<sub>i</sub>, these curves flatten (  $\omega_{\text{chem}}$  is insensitive to  $\eta$  for  $\eta$  > 0.4 ).

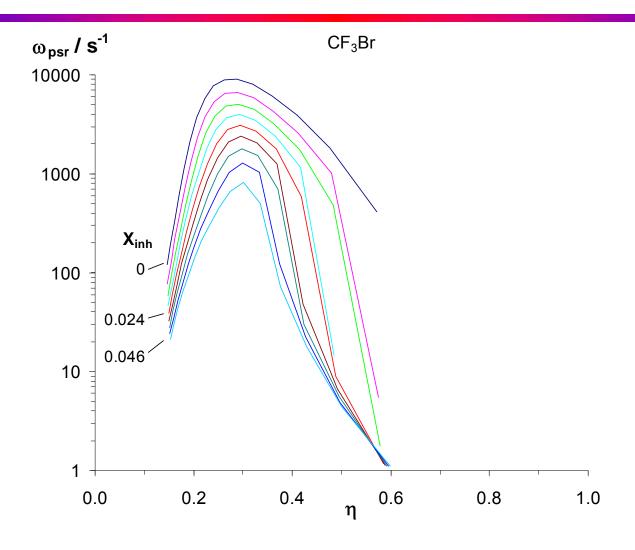

- Adding 1301  $\underline{\text{always}}$  lowers  $\omega_{\text{chem}}$  (for all  $\eta)$
- $\omega_{\text{chem}}$  falls off very steeply with  $\eta$  (for all  $X_{\text{inh}}\!;$  follows temperature results).

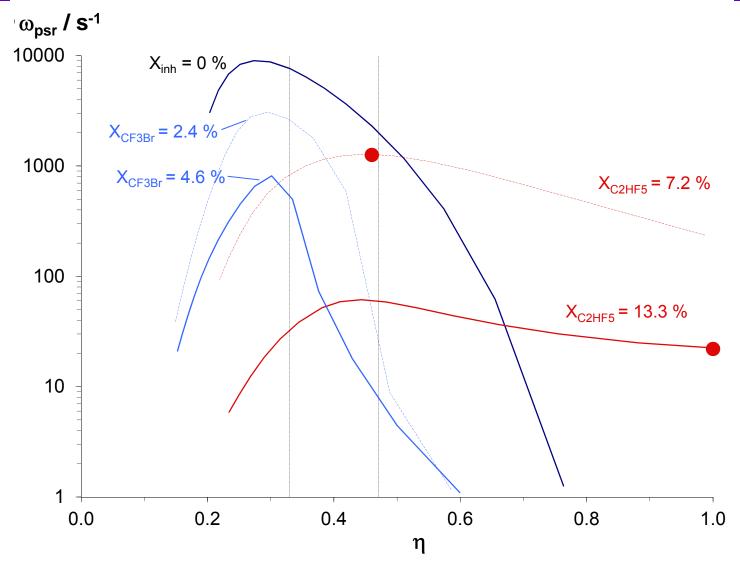

- For R-125, we can use pressure rise data with equilibrium calculations to estimate  $\eta$  (solid dots).
- For 1301, can't use pressure rise, so we don't really know  $\eta$ . =>BUT for 1301  $\omega_{chem}$  is very sensitive to  $\eta$ .

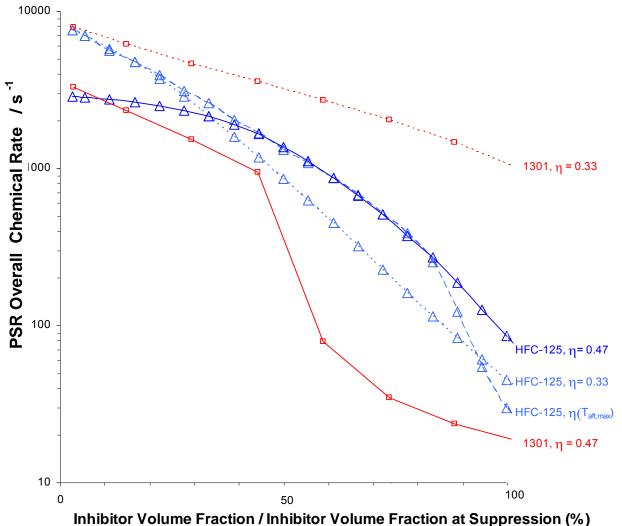

- 1. More agent generally reduces reaction rate, for all assumed values of  $\eta$ .
- For the case η=0.47, there is little change in reaction rate for the curve for HFC-125 up to 30 %.
- 3. For HFC-125 (blue curves), the reduction in reaction rate with addition of agent is similar regardless of the value of h; i.e., for  $\eta$ =0.33,  $\eta$ =0.47, or  $\eta$ ( $T_{aft|peak}$ ).
- 4. The effectiveness of the agent  $CF_3Br$  is very sensitive to the value of  $\eta$ .
- For CF<sub>3</sub>Br to be more effective than HFC-125, η must be greater than about 0.4.

#### Equilibrium and PSR Calculations Indicate:

- In the FAA ACT with R-125, Novec 1230, or 2-BTP, to achieve the observed pressure rise, a large fraction of the chamber volume (with the agent) must be involved in the combustion.
- 2. Thus, the agents are not inert, but rather, participate in exothermic reactions.
- 3. CF<sub>3</sub>Br will not cause a pressure rise in hydrocarbon-air systems (due to H<sub>2</sub>O + CF<sub>3</sub>Br stoichiometry).
- 4. The amount of chamber volume involved in the combustion,  $\eta$ , appears to be a key parameter controlling the kinetic behavior (i.e., the kinetic inhibition by CF<sub>3</sub>Br is very sensitive to  $\eta$ , but R-125 is not).

## Key Questions Still to Answer

- Does Br help slow the kinetics in the aerosol can test with 2-BTP?
- Is the amount of involved oxidizer the key feature?
- Why are the kinetics with R-125 not slower (i.e., slow enough for extinguishment)?
- Does the compression heating enhancement of the agent flammability and stop the chemical inhibition?
- Is the inerting concentration required for suppression?
- Is there any way around the undesired results?

## Acknowledgements

Wing Tsang, Don Burgess, NIST

John Reinhardt, Dave Blake FAA Technical Center

Med Colket, Ken Smith, UTRC

The work was supported by The Boeing Company.